

# ARKFEO

ANTISTATEX® RANGE



ARKFEO has extra open grit distribution which reduces clogging of the belt when sanding soft and resinous wood. The excellent cutting action of the aluminium oxide grit enables minimal fibre rising and more even surface.

The Antistatex® treatment provides a fully antistatic effect which further improves the lifetime of the product.

## TECHNICAL SPECIFICATION

- Backing:** F-weight paper
- Bonding:** Resin over resin
- Treatment:** Fully Antistatic
- Grit:** Aluminium Oxide
- Coating:** Extra-Open
- Grit range:** P 40—P 100 (A-Range\*)  
P 120—P 180 (B-Range\*)
- Width:** 1370 mm standard, 1420 mm per request

## APPLICATIONS

Calibrating and intermediate sanding of solid wood and veneer.


**Wood:** Soft Wood and Medium hard Wood

**Board:** Particle board

**Lacquer:**

**Specials:** Rubber

## RECOMMENDED FORMS

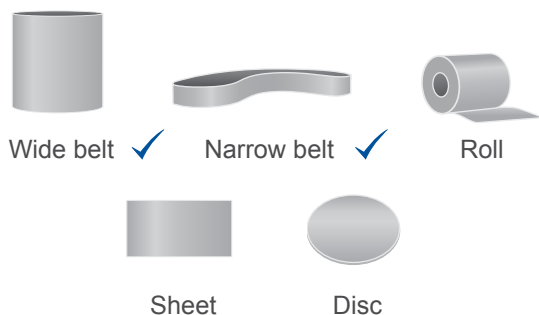

**EKAMANT**  
SWEDISH QUALITY COATED ABRASIVES