

# EKA 3000 N

ANTISTATEX® RANGE



EKA 3000 N has excellent cutting properties. The aluminium oxide grit together with the pliable paper backing achieve flexibility and an efficient lacquer sanding operation with fine scratch pattern.

EKA 3000 N is further treated with a new improved stearate coating which effectively reduces clogging problems and contributes to an improved surface finish.

The Antistatex® bonding system provides a fully antistatic effect which minimizes dust load both on the belt surface and on the sanding surface.

## TECHNICAL SPECIFICATION

- Backing:** E-weight paper
- Bonding:** Resin over resin
- Treatment:** Fully Antistatic with Stearate
- Grit:** Aluminium Oxide
- Coating:** Semi-Open
- Grit range:** P 240—P 320, P 400 (A-Range\*)  
P 500 (B-Range\*)
- Width:** 1370 mm standard, 1420 mm per request

## APPLICATIONS

Lacquer sanding of hard surface.


**Wood:**

**Board:**

**Lacquer:** Hard UV-lacquer, PU and PE lacquer and Water based lacquer

**Specials:** Melamine foil

## RECOMMENDED FORMS

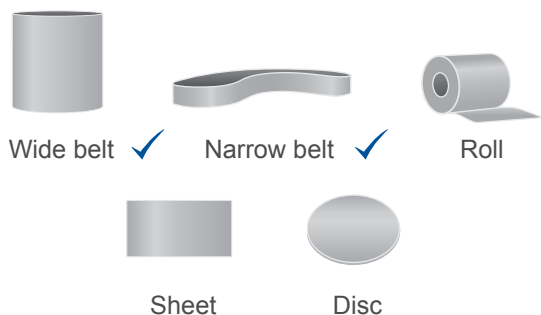

**EKAMANT**  
SWEDISH QUALITY COATED ABRASIVES