

# ARSFEO N

ANTISTATEX® RANGE



ARSFEO N is excellent for sanding of board panel and soft wood.

The silicon carbide grain coating of ARSFEO N will create an even and flat surface with a particularly fine finish, which minimizes the cost for subsequent surface treatment.

The Antistatex® bonding system provides a full antistatic effect which together with an extra open coat grit distribution and a third layer of Stearate minimizes clogging problems.

**Note:** This product is only available as B-Range product.

## TECHNICAL SPECIFICATION


<b>Backing:</b>	F-weight paper
<b>Bonding:</b>	Resin over resin
<b>Treatment:</b>	Fully Antistatic with Stearate layer
<b>Grit:</b>	Silicon Carbide
<b>Coating:</b>	Extra-Open
<b>Grit range:</b>	P 60—P 150 (B-Range*)
<b>Width:</b>	1370 mm standard

## APPLICATIONS

Calibrating and intermediate sanding of solid wood and board.

<b>Wood:</b>	Soft Wood and Resinous Wood
<b>Board:</b>	MDF, HDF and Particle board
<b>Lacquer:</b>	
<b>Specials:</b>	

## RECOMMENDED FORMS

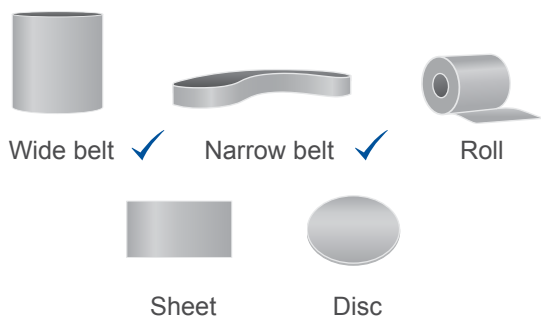

**EKAMANT**  
SWEDISH QUALITY COATED ABRASIVES