

# EKA 1000 E

## ANTISTATIC PAPER BACKING RANGE



EKA 1000 E with there excellent cutting action of the aluminium oxide grain enables an efficient sanding operation.

The antistatic paper backing reduces clogging problems and improves the lifetime of the product. It also contributes to cleaner surfaces when you are sanding wood, and potentially less lacquer consumption.


### TECHNICAL SPECIFICATION

- Backing:** E-weight paper
- Bonding:** Resin over resin
- Treatment:** Antistatic paper backing
- Grit:** Aluminium Oxide
- Coating:** Semi-Open
- Grit range:** P 240—P 320, P 400—P 600 (A-Range\*)  
P 120—P 220 (B-Range\*)
- Width:** 1370 mm

### APPLICATIONS

- Product for finishing sanding.
- Wood:** Veneer of Soft and Hard Wood
- Board:** MDF and HDF
- Lacquer:** UV-lacquer for flooring
- Specials:** Textile and Leather sanding

### RECOMMENDED FORMS

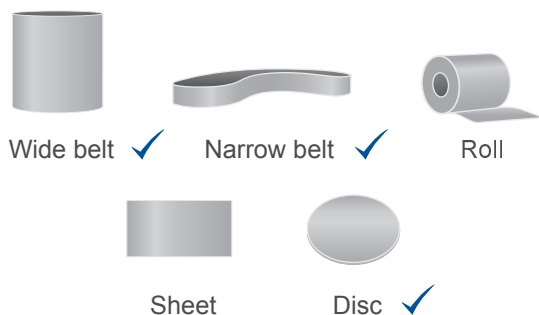

**EKAMANT**  
SWEDISH QUALITY COATED ABRASIVES